



CST *Cryo-Science Technologies*

Accessories



Liquid Cylinders

T-W Liquid Cylinders are used to supply and store liquid nitrogen with capacities up to 240 liters.



Transfer Hoses

Transfer hoses are constructed of a flexible stainless steel suitable for the transfer of cryogenic fluids and are available in 4 ft. (1.2 m) or 6 ft. (1.8 m) lengths. Hoses are fitted with a 3/8 in. NPT male fitting on one end and a CGA female fitting on the other end.

- 4' – CGA295 to 3/8" NPTP/N 1700-9C65
- 6' – CGA295 to 3/8" NPTP/N 1600-9C66



Cryogenic Phase Separators

Designed to minimize hazardous splashing and vaporization, phase separators are available in three different sizes to accommodate transferring liquids into various open containers. The two larger phase separators are designed to fit the 3/8 in. NPT end of Taylor-Wharton transfer hoses.

- 2 3/4" x 1 3/8 OD, 3/8" – 18 NPTP/N 1193-8C80
- 1 1/4" x 1 OD, 3/8" – NPTP/N 1193-8C82



Accessories

Taylor-Wharton
Cryogenics
Theodore, AL
1.251.443.8680

Taylor-Wharton
Australia Pty. Ltd.
Albury, NSW
61.2.6040.2533

Taylor-Wharton
Asia (M) Sdn Bhd
Selangor Darul Ehsan
60.3.5191.3003




Dippers and Measuring Rods

Safe and convenient LN₂ dippers available. The low conducting measuring rod will clearly show the LN₂ level of a dewar in inches and centimeters.

DipperP/N R018-8C50

Measuring RodP/N R033-8C11

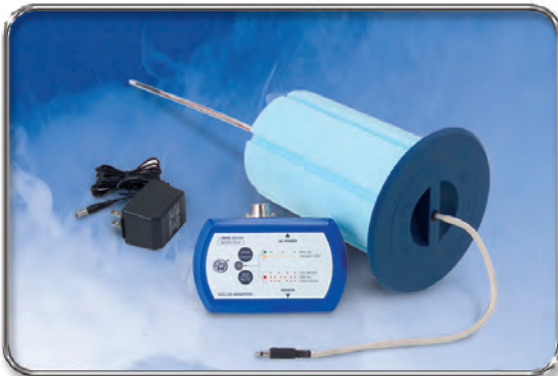

Low-Liquid Alarm

To protect valuable biological samples this alarm will sound promptly to alert you when more liquid nitrogen is needed. It is best suited for the infrequently used refrigerators and is recommended for stored product protection. It is equipped for battery operation. For use with XT20, XT34, HC20, HC34, HC35, VHC35, 3K, LS750, LS3000, LS4800 and LS6000.



Liquid Withdrawal Device

The Liquid Withdrawal Device enables the LD25, LD35 or the LD50 to conveniently pressure transfer liquid nitrogen at rates up to 8 liters per minute. The low [10 psig (0.7 bar/69kPa)] assures safe dispensing through a phase separator or an accessory transfer hose. A smaller phase separator is available.



Roller Base & Tipping Stand

The roller base is a sturdy, aluminum, five-wheel dolly that enables movement of refrigerators and dewars easily and safely. Choose from three sizes to fit either the 18.8 in (478 mm) dia., 15.6 in. (396 mm) dia., or the 26.7 in (678 mm) dia. units. The tipping provides mobility and assist in transferring liquid nitrogen for the LD25 dewar.